

PROVEN PERFORMANCE NEW MODERN DESIGN






PERFORMANCE YOU TRUST IN A

NEW MODERN DESIGN



DELIVERS THE PERFORMANCE HOMEOWNERS WANT

With the same proven performance both Contractors and homeowners trust, the Ruud® CRUTGH Series Super High Efficiency Condensing Tankless Water Heaters now offers a new modern design. These smaller, lighter units were designed with contractors in mind to make one-person installation and servicing even easier while saving the homeowner money and energy. Plus, enhanced features deliver the continuous hot water and energy efficiency homeowners want.

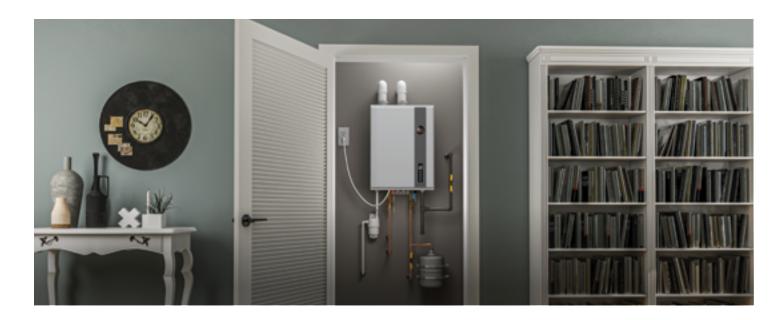

EARTH-FRIENDLY EFFICIENCY, FLEXIBLE INSTALLATION

High Efficiency Performance

- Up to 1.5X the efficiency of a standard 50-gallon gas tank² .93 UEF for condensing
- Up to 2.5X the lifespan of a standard 50-gallon gas tank² – With the industry's most comprehensive 15-year warranty³

Flexible Upgrade

- Industry-best ½" side-to-side and front clearance to combustibles⁵ – Provides peace of mind to install in a closet and close the door
- Easy-hang front door Slides down and hangs for easier servicing
- Faster servicing A Phillips screwdriver is all that's needed to disassemble the unit

Smarter Solution

Built-in EcoNet® Wi-Fi Technology lets homeowners control Ruud® CRUTGH Series Tankless Water Heater from their smart phone⁶

- Receive notifications, maintenance reminders and LeakGuard[™] leak detection alerts
- Set temperature, change modes, and access energy and water usage reports

Sustainable Solution

■ Reduces carbon footprint and energy usage – The CRUTGH Series uses up to 34% less energy⁴ than a standard 50-gallon tank, helping minimize environmental impact










RUUD® CRUTGH SERIES

JUPER HIGH EFFICIENCY CONDENSING TANKLESS

even during lower demand

Best-in-class turn down ratio – Achieve tighter control over temperature output



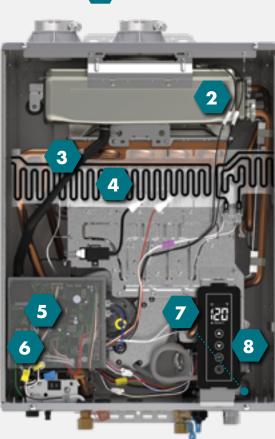

- 2" inlet & exhaust w/band connections
- Secondary stainless steel heat exchanger
- Primary copper heat exchanger
- Exclusive overheat film wrap

Protects the unit

Exclusive Hot Start Programming™

Minimizes cold water bursts⁸

6 Exclusive water saving feature

Saves water

LeakGuard™ with auto shut-off valve⁷

Detects leaks and shuts off the flow of water



HELP YOUR CUSTOMERS START SAVING TODAY

Learn more at **Ruud-canada.ca/tankless** or ask your local distributor



Ruud® CRUTGH Series Tankless Specifications

| Model Number | | CRUTGH- 68DVLN-3 | CRUTGH- 84DVLN-3 | CRUTGH- 90DVLN-3 | CRUTGH- 95DVLN-3 |
|-------------------------------------|---------------------|---|---------------------|---------------------|---------------------------------------|
| Built-in LeakGuard" Model Number | | | | | CRUTGH- 95DVELN-3 (Wi-Fi Model) |
| Gas Input Rate | MAX | 120,000 BTU/h | 157,000 BTU/h | 180,000 BTU/h | 199,900 BTU/h |
| | MIN | 11,000 BTU/h | 11,000 BTU/h | 11,000 BTU/h | 11,000 BTU/h |
| Uniform Energy Factor (UEF) | | 0.90 | | | 7 |
| | MAX (35°F) | 6.6 | 8.4 | 9.0 | 9.5 |
| Gallons Per Minute | 45°F Rise | 5.1 | 6.7 | 7.7 | 8.5 |
| (GPM) | 67°F Rise | 3.4 | 4.6 | 5.2 | 5.7 |
| Number of B | Number of Bathrooms | | 3 | 3-4 | 4 |
| Temp. Range | | 100–140°F | | | |
| Height | | 23.7" | | | |
| Width | | 17.7" | | | |
| Depth | | 9.8" | | | |
| Weight (Lbs.) | | 52.9 | | | |
| Temp. Setting from Factory | | 120°F | | | |
| Heat Exchanger Material | | Primary: Copper – Secondary: Stainless Steel | | | |
| Minimum Activation Flow | | 0.4 GPM | | | |
| Minimum Continuous Flow | | 0.26 GPM | | | |
| Maximum Altitude | | 7,800 ft. | | | |
| Ultra Low NOx | | Meets 14 ng/J NOx requirements – SCAQMD Rule 1146.2 compliant | | | |
| Warranty | | 15-Year Heat Exchanger 5-Year Parts 1-Year Labor | | | |

All models are available in Natural Gas or Propane (LP). For Propane replace the N with P for LP model.

CONTACT US

Customer Service, Warranty and Parts: 800.621.5622 **Technical Service:** 800.HEATER3 (800.432.8373)

EcoNet® Support: 800.255.2388

Plumber Support Group: 866.339.2388



'Sustainability Standouts are Wi-Fi models only. ²Based on comparison of a Ruud CRUTGH Series model against a standard residential 50-gallon tank type model with like fuel type. ³Based on comparison of Ruud CRUTGH Series models against similar models from leading tankless competitors. ⁴Based on reduction in energy usage of Ruud CRUTGH Series models with a 0.93 UEF compared to a standard residential atmospheric 50-gallon tank type model with a 0.61 UEF. Assumes like fuel type, not to exceed 75,000 BTU. ⁵Based on comparison of Ruud CRUTGH Series model against standard residential 50-gallon tank type model with like fuel type, not to exceed 75,000 BTU. ⁵Applies only to models with Wi-Fi; Wi-Fi broadband connection and EcoNet® App required; notifications are dependent on external factors beyond Ruud's control. ⁷Available on indoor Wi-Fi models only. When converting indoor Wi-Fi with LeakGuard models to outdoor, included cable and indoor mount should be used. This cable disables leakGuard in outdoor installations to avoid false alarms and shut-off. Reference outdoor conversion instructions for more information on cable installation. ⁸Based on a comparison of Ruud CRUTGH Series models having the Hot Start Programming¹⁰ against consumer reviews of leading competitor models.